



Dual


Power Pedestal

Specifications

EarlyBird Dual

Properties

Number of connections	4 (2x CEE & 2x Mode 3)
Cable entry	Bottom side
Connection terminals	Screw
Connection rating	3x 63A + Neutral + Earth
Connection voltage	400V
Protection	Residual current breaker
Network connection	4G
Protocol	OCPP 1.6/Sentranse
Control	Payment terminal / App
Operating temperature	-25° C / 50° C
IP Class	IP54

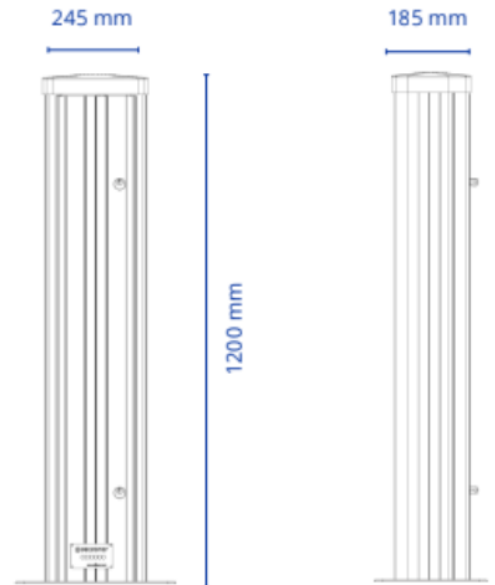

Socket - 2x CEE

Type of socket	CEE (external 16A/230V)
Meter	MID meter via modbus
Connection rating per socket	1x16A
Protection	Residual current breaker 16A type A 30mA
Indication type	Blue LED

Socket - 2x Type 2

Socket type	Type 2 (flap cover)
Charging protocol	Mode 3
Meter	MID meter via modbus
Connection rate per socket	3x16A
Protection	Residual current breaker 16A type A 30mA
Indication type	RGB LED

Housing

Dimensions	6x277x287 mm (HxWxD)
Material	Extruded aluminum ALMG3
Color charger	Powder-coated RAL9016 (white)
Top color:	Powder-coated RAL1037 (orange)
Base plate dimensions:	6x277x287 mm (HxWxD)
Foundation	Steel foundation (sold separately)
Lock type:	Profile cylinder lock