



E + W


Power and Water Pedestal

Specifications

EarlyBird E+W

Properties

Number of connections	5 (4x CEE & 1x water)
Cable entry	Bottom side
Connection terminals	Screw
Connection rating	3x 32A + Neutral + Earth
Connection voltage	400V
Protection	Residual current breaker
Network connection	4G
Protocol	OCPP 1.6/Sentranse
Control	Payment terminal / App
Operating temperature	-25° C / 50° C
IP Class	IP54

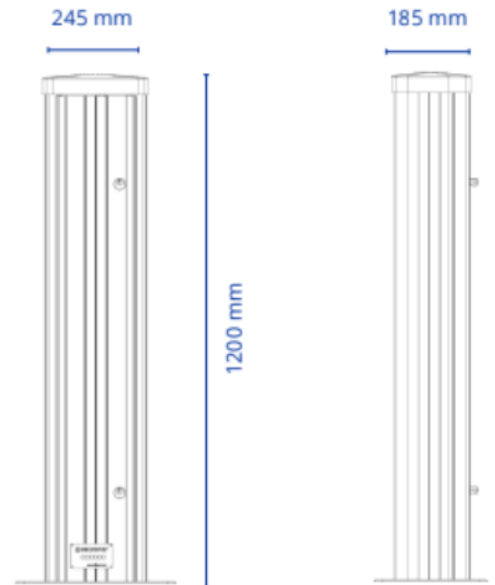

Socket - 4x CEE

Type of socket	CEE (external 16A/230V)
Meter	MID meter via modbus
Connection rating per socket	1x16A
Protection	Residual current breaker 16A type A 30mA
Indication type	Blue LED

Water tap

Tap type	Aerator tap 1/2"
Tap connection	16mm PE
Meter	Watermeter (pulse)
Type of hose reels	1x Fixed aluminum reel
Protection	Automatic water valve
Type of indication	Blue LED

Housing

Dimensions	6x277x287 mm (HxWxD)
Material	Extruded aluminum ALMG3
Color pedestal	Powder-coated RAL9016 (white)
Top color:	Powder-coated RAL1037 (orange)
Base plate dimensions:	6x277x287 mm (HxWxD)
Foundation	Steel foundation (sold separately)
Lock type:	Profile cylinder lock