



Tap&Go


Payment Terminal

Specifications

EarlyBird Tap&Go

Features

Cable entry	Bottom side
Connection terminals	Screw
Connection rating	1x 16A + Neutral + Earth
Connection voltage	230V
Protection	Residual current breaker
Network connection	4G
Protocol	Proprietary secure connections
Control	Debit and credit card
Operating temperature	-25 °C tot 50 °C
IP Class	IP54

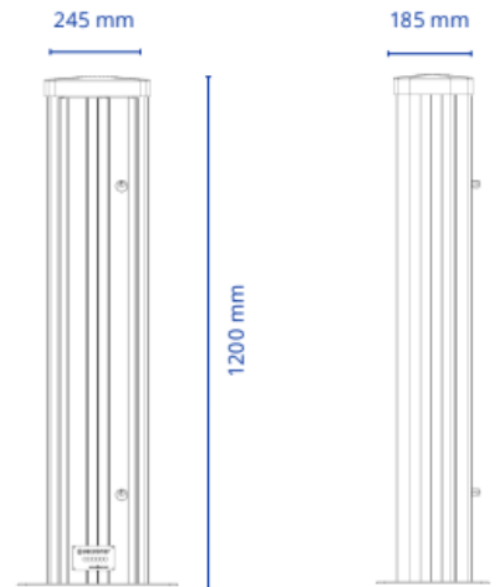

Payment Terminal

Screen type	3.5" IPS LCD Display
Color screen	256K Color palette,
Control	Capacitive Touch screen interface
Color terminal	Zwart
Dimensions	83.2 x 107.2 x 28.5 mm (HxBxD)
Indication type	4x RGB LEDs
Payment methods	Mastercard, Maestro, Visa, VPAY, American Express, Goolge Pay & Apple Pay
Wireless interface	EMVCo. L1 v3.0 Certified ISO14443 Type A & B (T=CL) Mifare Classic protocol Desfire protocol EV2/3 ISO18092: Support NFC Protoco

Housing

Dimensions	6x277x287 mm (HxWxD)
Material	Extruded aluminum ALMG3
Color pedastal	Powder-coated RAL9016 (white)
Top color:	Powder-coated RAL1037 (orange)
Base plate dimensions:	6x277x287 mm (HxWxD)
Foundation	Steel foundation (sold separately)
Lock type:	Profile cylinder lock